



# INSTALLATION INSTRUCTIONS



# Contents

- I. Product Description
- II. Safety Warnings
- III. Before You Begin
- IV. Installation Requirements
- V. Wall Preparation
- VI. Plumbing Preparation
- VII. Installing the Bidet



# Product Description

- I. The Oceandell Wall-Hung Bidet is a modern ceramic sanitaryware product designed for wall-mounted bathroom installation.
- II. The bidet is suitable for connection to hot and cold water supplies through a compatible bidet mixer. It is designed to be installed with a concealed wall support frame or a suitable heavy-duty wall fixing system.
- III. The product is manufactured for modern bathroom spaces where a clean, minimal, and elevated installation finish is required.

# Safety Warnings

- I. Before installation, carefully inspect the bidet for any visible damage.
- II. Do not install the product if the ceramic body is cracked, chipped, or damaged.
- III. Turn off the water supply before beginning installation.
- IV. Always check for hidden pipes, cables, or services before drilling into the wall.
- V. The wall structure must be strong enough to support the bidet after installation.
- VI. A suitable concealed wall support frame or secure mounting system must be used.
- VII. Do not overtighten fixing bolts, screws, or connectors, as this may damage the ceramic body.
- VIII. The product must not be used until all water and waste connections have been tested for leakage.

# Before You Begin

Before starting the installation, make sure all required tools, fittings, and plumbing connections are ready.

Item	Requirement
<b>Support System</b>	Concealed wall frame or suitable wall fixing system
<b>Mixer</b>	Compatible bidet mixer
<b>Waste</b>	Compatible pop-up waste
<b>Water Supply</b>	Hot and cold water connections
<b>Isolation Valves</b>	Required for both hot and cold supplies
<b>Waste Connection</b>	Suitable waste trap and pipe connection
<b>Sealant</b>	Sanitary-grade silicone sealant
<b>Tools</b>	Drill, level, spanners, screwdrivers, measuring tape

# Installation Requirements

- I. The Oceandell bidet must be installed on a strong and stable wall structure.
- II. For wall-hung installation, a concealed support frame is recommended. The frame must be installed behind the finished wall and securely fixed to the building structure.
- III. The fixing rods or wall mounting bolts must be aligned with the fixing holes of the bidet.
- IV. All water and waste pipework must be prepared before closing or finishing the wall.
- V. The hot and cold water supplies must be fitted with isolation valves to allow future maintenance.
- VI. The waste pipe must be securely fixed to prevent movement during or after installation.

# Wall Preparation

- I. Install the concealed support frame or wall fixing system according to the frame manufacturer's instructions.
- II. Make sure the frame is level, stable, and firmly secured.
- III. The support frame must sit tightly behind the finished wall surface.
- IV. There must be no gap between the support frame and the finished wall, as this may affect the stability of the bidet.
- V. The finished wall surface must be flat and strong enough to support the ceramic body.
- VI. Before closing the wall, confirm that all set-outs are correctly positioned.

# Plumbing Preparation

- I. Prepare the hot and cold water supplies according to the selected bidet mixer specification.
- II. The water points must be positioned to allow easy connection to the mixer hoses.
- III. The waste outlet must be aligned with the bidet waste position.
- IV. The waste pipe behind the wall must be securely fixed to avoid movement when connecting the bidet waste.
- V. A suitable trap and waste connection must be used according to the plumbing requirements of the project.

# Recommended Plumbing and Installation Set-Out

Code	Description	Measurement / Requirement
A	Waste pipe height from finished floor	To be confirmed on site
B	Waste pipe projection from finished wall	According to waste connection
C	Hot and cold water point height	According to mixer specification
D	Distance between water points	According to mixer specification
E	Fixing rod height	According to support frame position
F	Distance between fixing rods	Match bidet fixing holes
G	Bidet projection from wall	555 mm
H	Bidet width	360 mm
I	Bidet height	330 mm
J	Tap hole diameter	Ø35 mm
K	Waste outlet diameter	Ø45 mm

## Important:

Final plumbing positions must be confirmed on site before installation. The dimensions must match the actual product, fixing kit, mixer, and waste system being used.

# Installing the Bidet



## 1 Turn Off Water Supply

Turn off the hot and cold water supplies before beginning installation.




## 2 Install the Support Frame

Install the concealed wall support frame or approved wall fixing system.

Make sure the fixing rods are positioned correctly and are suitable for the wall-hung bidet.

Check that the frame is level and firmly secured.

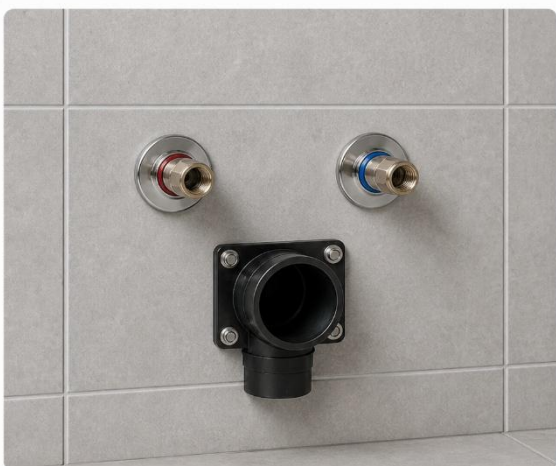


## 3 Prepare Water and Waste Connections

Prepare the hot and cold water supplies.

Prepare the waste pipe connection.

Make sure all pipework is fixed securely and correctly aligned with the bidet.

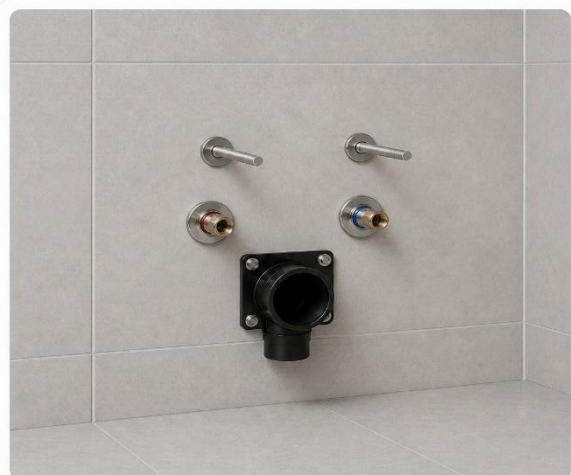

## 4 Finish the Wall

Complete the finished wall surface after checking all fixing and plumbing positions.

Make sure the fixing rods and plumbing connections remain accessible and correctly aligned.

# Installing the Bidet



## 5 Install the Bidet Mixer

Fit the bidet mixer to the tap hole according to the mixer manufacturer's instructions.

The tap hole size is: Ø35 mm

Make sure the mixer is firmly fixed and correctly positioned.



## 6 Install the Pop-Up Waste

Fit the pop-up waste to the bidet according to the waste manufacturer's instructions.

The waste outlet size is: Ø45 mm

Make sure the waste fitting is correctly sealed to prevent leakage.



## 7 Connect the Waste System

Connect the required waste trap and pipe connection to the bidet waste outlet.

Make sure the waste pipe is aligned correctly.

Do not force the ceramic body into position if the waste connection is not aligned.



## 8 Position the Bidet

Carefully lift and position the bidet onto the wall fixing rods or mounting bolts.

Make sure the bidet sits flat against the finished wall surface.

Use a spirit level to check that the bidet is level.

# Installing the Bidet



## 9 Connect Water Supplies

Connect the hot and cold water supply hoses to the bidet mixer.

Make sure the hot and cold connections are connected correctly.

Tighten the connections carefully.

Do not overtighten.



## 10 Secure the Bidet

Secure the bidet to the wall fixing system using the fixing kit supplied or recommended for the installation.

Tighten the fixings evenly and carefully.

Do not apply excessive pressure to the ceramic body.



## 11 Test for Leaks

Open the hot and cold water supplies.

Run water through the bidet mixer.

Check all water supply connections for leaks.

Fill and drain water through the bidet to test the waste connection.

Check the waste pipe, trap, and outlet connection carefully.



## 12 Seal the Installation

After confirming that there are no leaks, apply sanitary-grade silicone sealant around the rear edge of the bidet where it meets the wall.

Apply a neat and continuous bead of sealant.

Remove excess silicone and leave it to cure according to the sealant manufacturer's instructions.



86-90 Paul Street  
London, United Kingdom, EC2A 4NE  
+44 7778 365130  
[support@oceandell.com](mailto:support@oceandell.com)  
[oceandell.com](http://oceandell.com)